LOCKING PLATES, FOR OCTOPUS GRIPPING BARS WITHOUT VACUUM GENERATOR


The locking plate with manifold described in this page has been designed to connect an OCTOPUS gripping bar to a remotely installed vacuum generator or to an alternative vacuum source.

This anodised aluminium plate is fixed with screws to the body of the OCTOPUS bar, instead of the generator. The manifold is equipped with connectors for a direct connection to the OCTOPUS bar, to the generator or to the alternative vacuum source, as well as to vacuum level reading and control devices. The unused connections can be closed with special metal caps which they are equipped with.

The locking plate with manifold is suited for any kind of OCTOPUS gripping bar that uses PVP 12 MX and PVP 25 MX vacuum generators.



Art.	For OCTOPUS gripping bars
00 B0 07	BO 08 60 X
	BO 08 80 X
	BO 12 60 X
	BO 12 80 X
	BO 12 100 X
	BO 12 120 X

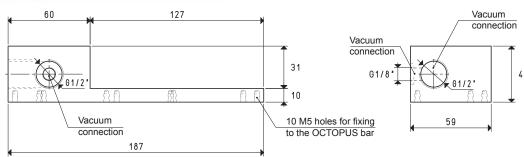

LOCKING PLATES FOR, OCTOPUS GRIPPING BARS WITHOUT VACUUM GENERATOR

The locking plate described in this page has been created to close the suction holes on the OCTOPUS bar body and left free by the removal of the vacuum generator.

This anodised aluminium plate is fixed with screws to the OCTOPUS bar instead of the generator. The gasket provides perfect seal. The locking plate with manifold is suited for any kind of OCTOPUS gripping bar that uses PVP 12 MX and PVP 25 MX vacuum generators.

10



0	0	+	+	+	
					59
0	⊕	0	0	Վ↓	
4	1	187		_/_	1) M5 holes for fixing to the OCTOPUS bar

Art.	For OCTOPUS gripping bars
00 B0 06	BO 08 60 X
	BO 08 80 X
	BO 12 60 X
	BO 12 80 X
	BO 12 100 X
	BO 12 120 X

